

# ASEPTIQUIK® G SERIES CONNECTORS



**Genderless AseptiQuik® G Connectors** enable quick and easy sterile connections, even in non-sterile environments. The easy-to-use genderless design simplifies system integration and minimizes the risk of operator error. The connectors' robust construction provides enhanced user confidence and reliable performance without the need for clamps, fixtures or tube welders. Biopharmaceutical manufacturers benefit from a full range of interchangeable 1/4" to 1-1/2" termination solutions with the quality and market availability they expect from the leader in single-use connection technology.

## FEATURES

Genderless design

Robust construction

FLIP-CLICK-PULL

Integrated pull tab covers

CPC Click

Chemical Compatibility

pH range

AseptiQuik PPSU is BPA free

## BENEFITS

Eases integration of single-use systems with one part number for both halves

Repeatable and reliable performance with no additional hardware required

Innovative three-step connection process reduces risk of operator error

Pull tabs act as protective cover reducing part complexity and ensure simultaneous removal of both membranes

Audible confirmation of assembly

AseptiQuik PPSU enables genderless connection for a greater range of chemical applications.

AseptiQuik PPSU: Versatile connections across downstream processes with a pH range from 2 to 12

Meets a broader range of Application Requirements

## Specifications ● ● ●

### OPERATING PRESSURE:

Up to 60 psi, 4.1 bar  
Up to 75 psi, 5.1 bar for 48 hours

### OPERATING TEMPERATURE:

34°F to 104°F (1°C to 40°C)

**Storage Temperature:**  
Down to -112°F (-80°C)

### STERILIZATION:

**Standard (blue) and PPSU (purple) Version:**  
Gamma: up to 50kGy

**High Temperature (white) Version:**  
Gamma: up to 50kGy  
Autoclave:  
One cycle up to 266°F (130°C) for 60 minutes

### TERMINATION SIZES:

1/4", 3/8", 1/2", 3/4" ID hose barb (6.4mm, 9.5mm, 12.7mm, 19.0mm) and 3/4", 1-1/2" sanitary

### MATERIALS:

#### Main Components:

Polycarbonate (white), (standard and HT versions)  
Polyphenylsulfone (off white) (PPSU version)

#### Pull Tabs/Caps:

Polycarbonate (blue, standard), (white, HT version), (purple, PPSU version)

#### Seals:

Silicone (clear), platinum-cured

#### Membrane:

Polyethylene (standard and PPSU versions),  
Hydrophobic polyethersulfone (HT version), PTFE strip sticker

*Genderless interface allows easy transition between multiple tubing sizes from 1/4" to 1-1/2".*

Visit us at [cpcworldwide.com](http://cpcworldwide.com) or call 800-519-7633 to get a free catalog or to find your local distributor.


PHARMASEP

Always by your side

E-mail : [contact@pharmasep.fr](mailto:contact@pharmasep.fr)  
[www.pharmasep.fr](http://www.pharmasep.fr) - Tél : +33 4 74 71 94 71  
260, rue Georges Charpak - 01390 Civrieux - France

# ASEPTIQUIK® G SERIES DIMENSIONS

- A** = Height/Diameter
- B** = Total Length
- C** = Hose Barb Length

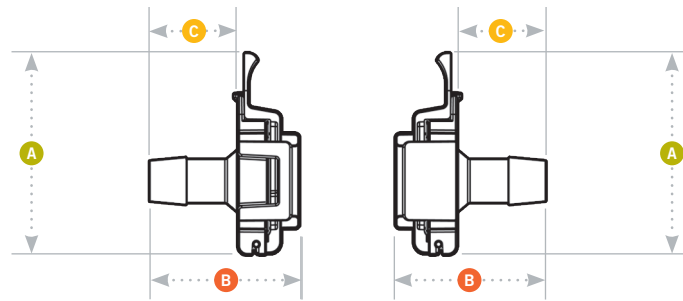

## Coupling Bodies

### • POLYCARBONATE with Blue Pull Tabs

For gamma irradiation applications.



TERMINATION	METRIC QU.	PART NO.	A	B	C
1/4" HOSE BARB	6.35 mm	AQG17004	2.62" (66.55 mm)	1.62" (41.15 mm)	0.82" (20.83 mm)
3/8" HOSE BARB	9.525 mm	AQG17006	2.62" (66.55 mm)	1.62" (41.15 mm)	0.82" (20.83 mm)
1/2" HOSE BARB	12.7 mm	AQG17008	2.62" (66.55 mm)	1.95" (49.53 mm)	1.15" (29.21 mm)
3/4" HOSE BARB	19.05 mm	AQG17012	2.62" (66.55 mm)	2.36" (59.94 mm)	1.56" (39.62 mm)
3/4" SANITARY	19.05 mm	AQG33012	2.62" (66.55 mm)	1.66" (42.16 mm)	0.86" (21.84 mm)
1-1/2" SANITARY	38.1 mm	AQG33024	2.62" (66.55 mm)	2.86" (72.64 mm)	2.02" (51.31 mm)

### • POLYCARBONATE HT with White Pull Tabs

For autoclave or gamma irradiation applications.



TERMINATION	METRIC QU.	PART NO.	A	B	C
1/4" HOSE BARB	6.35 mm	AQG17004HT	2.62" (66.55 mm)	1.62" (41.15 mm)	0.82" (20.83 mm)
3/8" HOSE BARB	9.525 mm	AQG17006HT	2.62" (66.55 mm)	1.62" (41.15 mm)	0.82" (20.83 mm)
1/2" HOSE BARB	12.7 mm	AQG17008HT	2.62" (66.55 mm)	1.95" (49.53 mm)	1.15" (29.21 mm)
3/4" HOSE BARB	19.05 mm	AQG17012HT	2.62" (66.55 mm)	2.36" (59.94 mm)	1.56" (39.62 mm)
3/4" SANITARY	19.05 mm	AQG33012HT	2.62" (66.55 mm)	1.66" (42.16 mm)	0.86" (21.84 mm)
1-1/2" SANITARY	38.1 mm	AQG33024HT	2.62" (66.55 mm)	2.86" (72.64 mm)	2.02" (51.31 mm)

### • POLYPHENYLSULFONE with Purple Pull Tabs

For gamma irradiation applications.



TERMINATION	METRIC QU.	PART NO.	A	B	C
1/4" HOSE BARB	6.35 mm	AQG17104	2.62" (66.55 mm)	1.62" (41.15 mm)	0.82" (20.83 mm)
3/8" HOSE BARB	9.525 mm	AQG17106	2.62" (66.55 mm)	1.62" (41.15 mm)	0.82" (20.83 mm)
1/2" HOSE BARB	12.7 mm	AQG17108	2.62" (66.55 mm)	1.95" (49.53 mm)	1.15" (29.21 mm)
3/4" HOSE BARB	19.05 mm	AQG17112	2.62" (66.55 mm)	2.36" (59.94 mm)	1.56" (39.62 mm)
3/4" SANITARY	19.05 mm	AQG33112	2.62" (66.55 mm)	1.66" (42.16 mm)	0.86" (21.84 mm)



COLDER PRODUCTS COMPANY  
U.S.A.

PHONE +1 651-645-0091  
FAX +1 651-645-5404  
TOLL FREE 800-519-7633

PHARMASEP

Always by your side

E-mail : [contact@pharmasep.fr](mailto:contact@pharmasep.fr)  
www.pharmasep.fr - Tél : +33 4 74 71 94 71  
260, rue Georges Charpak - 01390 Civrieux - France

Confidence at every point of connection.

[cpcworldwide.com/ContactUs](http://cpcworldwide.com/ContactUs)

WARRANTY: All sales are subject to Colder Products Company's limited express warranty set forth in the CPC catalog. Contact your local distributor or CPC Customer Service for warranty provisions.

Warning: Due to the wide variety of possible fluid media and operating conditions, unintended consequences may result from the use of this product, all of which are beyond the control of CPC. It is the user's responsibility to carefully determine and test for compatibility for use with their application. All such risks shall be assumed by the buyer.

COPYRIGHT © 2019 BY COLDER PRODUCTS COMPANY. COLDER PRODUCTS COMPANY, COLDER PRODUCTS AND CPC ARE REGISTERED TRADEMARKS WITH THE US PATENT & TRADEMARK OFFICE.

SPEC1032 11/20